# Bluetooth Keyboard User Manual

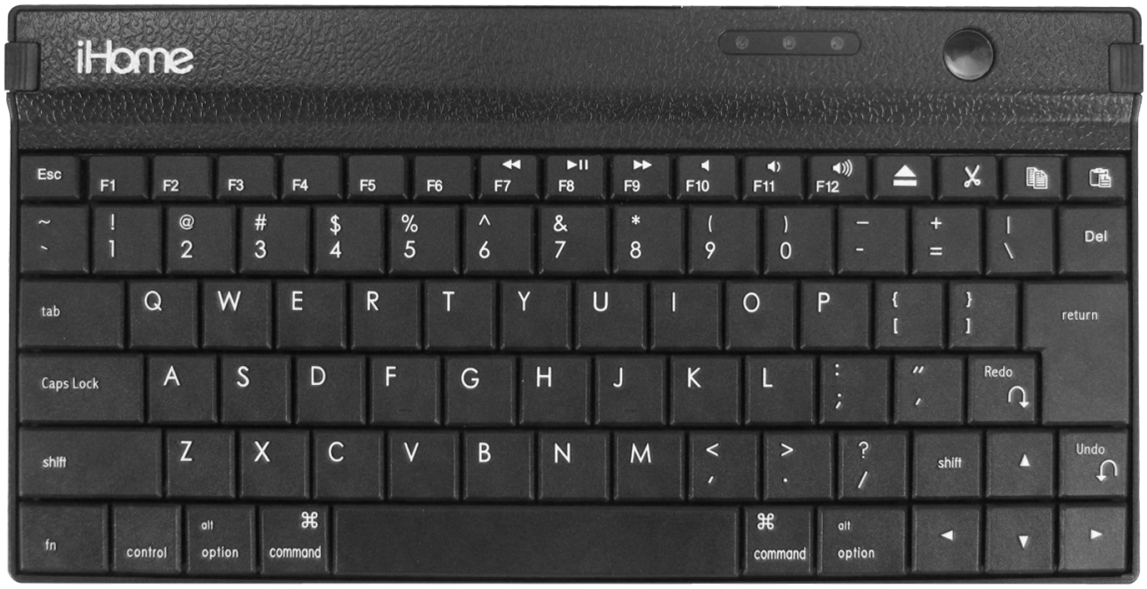


## IH-IP2100 Bluetooth Keyboard

### System Requirements:

- APPLE iMAC / iPad / iPad 2 / iPhone 4 which build in Bluetooth receiver.
- MAC OS 10.xx or later.

**Features:**

1. Support Language: US, Europe, Chinese, Japanese
2. Slim & Scissors structure Design
3. Compatibility with Mac Pro, iPad, iPad 2, iPhone 4,Galaxy Tab.
4. Keyboard Function: Add Cut, Copy, Paste, Undo, Redo Keys.
5. Active Range: around 10 meter
6. Auto Connect Button: Available
7. With Power on/off Switch.
8. 3 LED indicators for Battery Low , Recharge and Bluetooth Connectivity

**Specifications:**

9. Bluetooth V 2.0 specification compliant.
10. Bluetooth HID profile V 1.1 compliant.
11. Frequency Range: 2.4G ~ 2.4835GHz
12. Peak Power consumption: 3 mA Max
13. Build in 3.7V, 300mA Lithium Battery, can be rechargeable.
14. Sleep mode Power consumption: 500uA

15. Security Encryption: 128 bits
16. Support AFH (Adaptive Frequency Hopping).
17. Key Force: 55±7g
18. Key Travel: 2.0+/- 0.3mm
19. Switch Life: 10 Million Cycles
20. Keyboard Dimensions: 242(L) x 120(W) x 8 (H) mm
21. Weight: 150 ±20 g

## Syncing Bluetooth Keyboard with Your iPad

1. Turn the switch on the back of the Bluetooth keyboard to the on position.

2. Press " CONNECT " button of the Bluetooth keyboard , and blue LED will flash.

3. Tap the "Settings" icon on your iPad to open the Settings menu.

4. Press the "Off" button under the Bluetooth heading to turn on the iPad's Bluetooth radio. The iPad will now search for and list devices it can connect with.

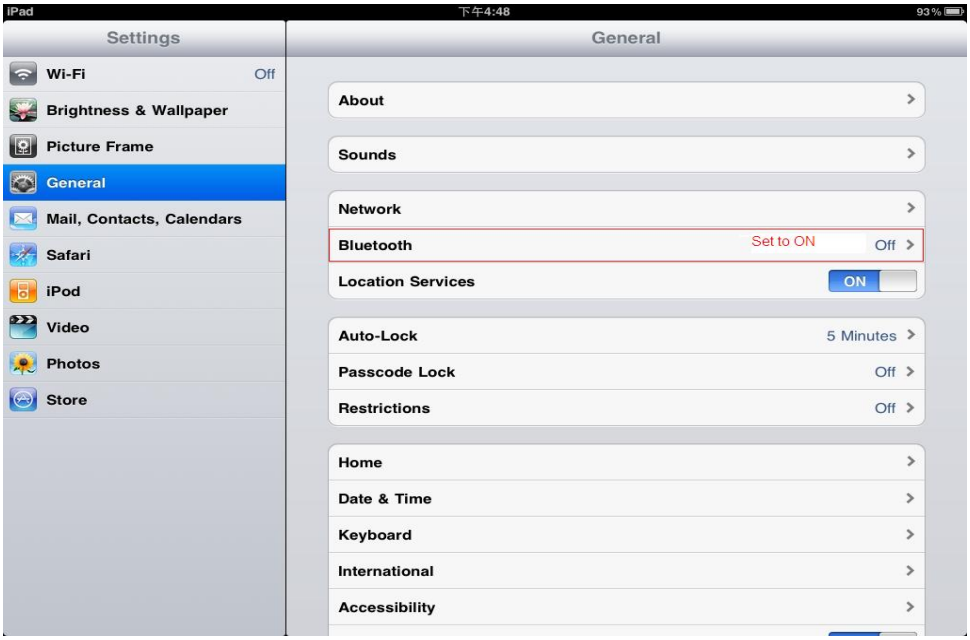


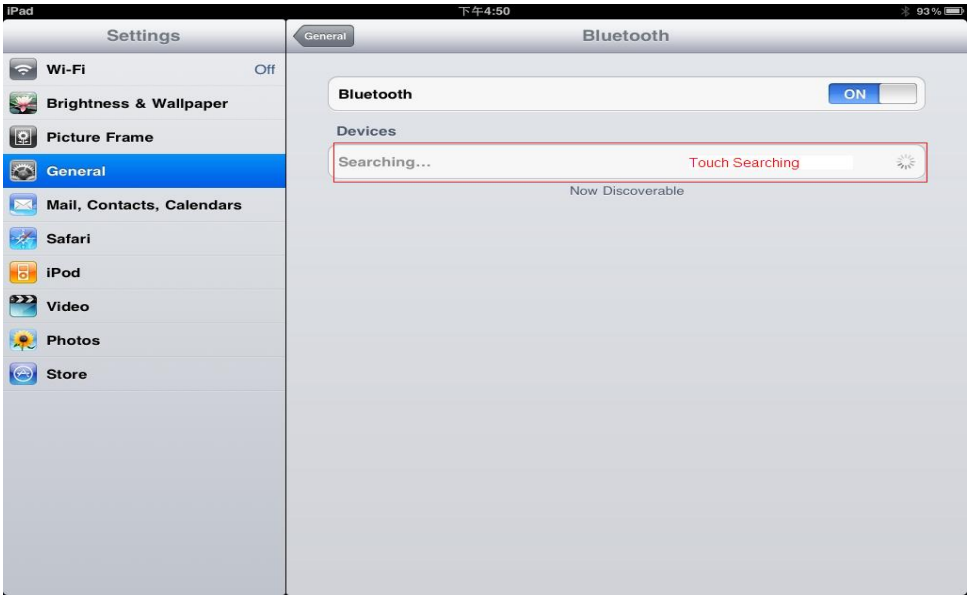

5. Tap the name of your Bluetooth keyboard when it shows up on your iPad. A Passkey number will be shown on the iPad. Type this number on your Bluetooth keyboard and press "Enter." The iPad and keyboard will now be paired.

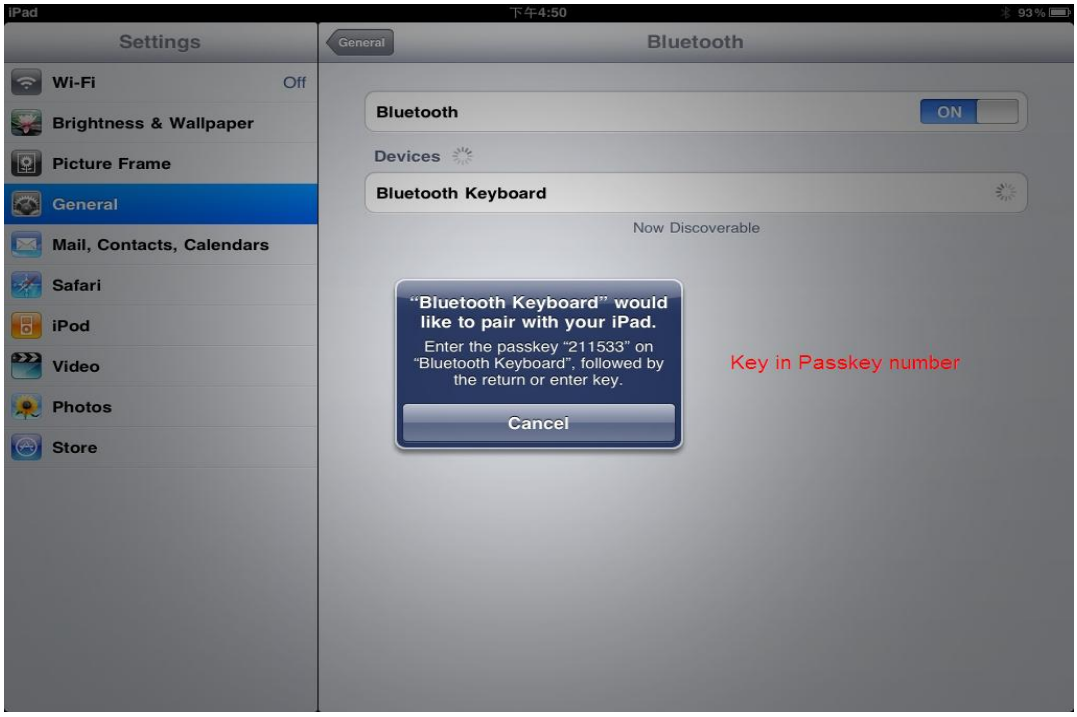


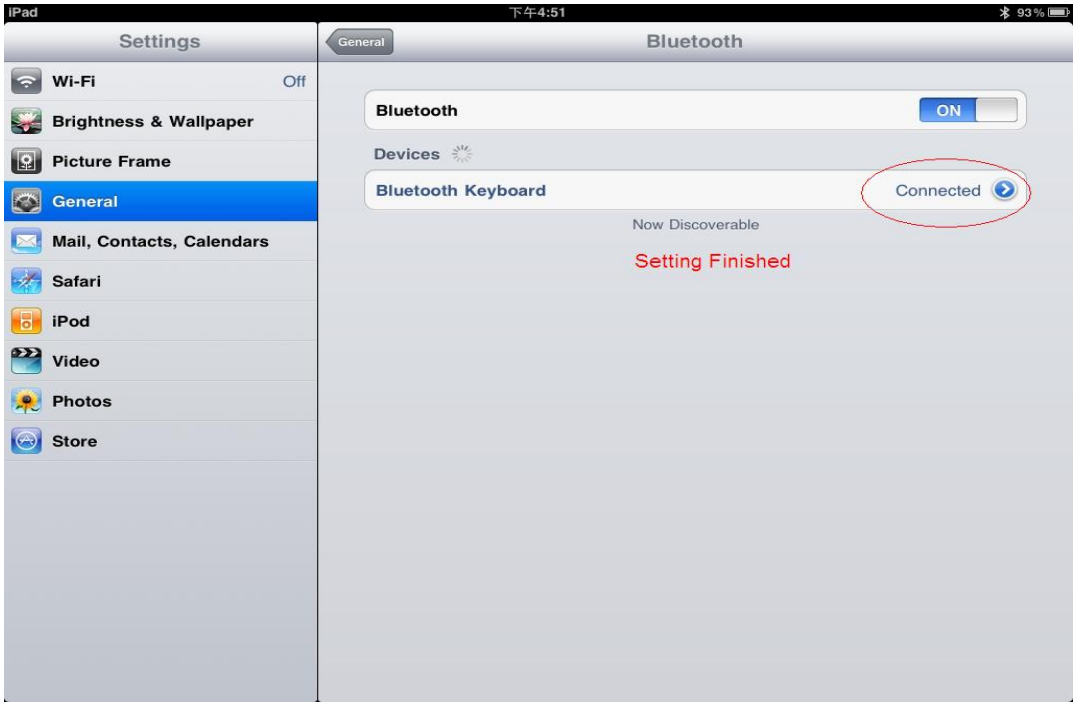


6. Open an iPad application you can type in, such as Notes or Pages. You should be able to type with the Bluetooth keyboard.

# Charging the Bluetooth Keyboard

Plug the mini USB adapter into the Bluetooth Keyboard's charging port located on the back of the Bluetooth Keyboard.

Plug the USB cable into an available USB port on your computer, or a USB AC adapter

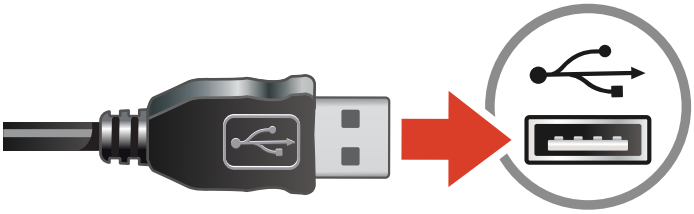

The included USB charging cable is specially designed to charge the Bluetooth Keyboard and the iPad at the same time.  Simply plug the iPad's USB charging cable into the empty USB port on the rear of the provided USB adapter.

## Syncing Bluetooth Keyboard with Your Mac Pro

1) Make Sure That Your Computer Has Bluetooth
If you didn't physically connect a Bluetooth adapter to your computer; make sure that your computer has a Bluetooth module installed. In Mac OS X 10.3 and later, open System Preferences (from the **Apple** menu, choose **System Preferences**) and verify that “Bluetooth” appears in the Hardware section of the window.

2) Turn On Bluetooth
In System Preferences click Bluetooth and then click the Settings tab. If you don't see “Bluetooth Power: On,” click the “Turn Bluetooth On” button. Make sure that you also enable Bluetooth on your device too, please refer to your device's documentation for instructions.

3) Set Up a Bluetooth Keyboard
To set up an Wireless Bluetooth Keyboard, open System Preferences, click Keyboard & Mouse, click the Bluetooth tab, and then click “Set Up New Device” to open the Bluetooth Setup Assistant. Follow the onscreen instructions to set up your keyboard.

## Note:

LED indicator status:

- Blue LED: Bluetooth keyboard is searching and pairing with Bluetooth device when the LED is flashing. Once the LED stop flashing, the pairing will be success.
- Amber LED: Alert the batteries should be change to new one when the LED is flashing.